


**MODEL 704 / 805
SWIVEL REPLACEMENT INSTRUCTIONS**

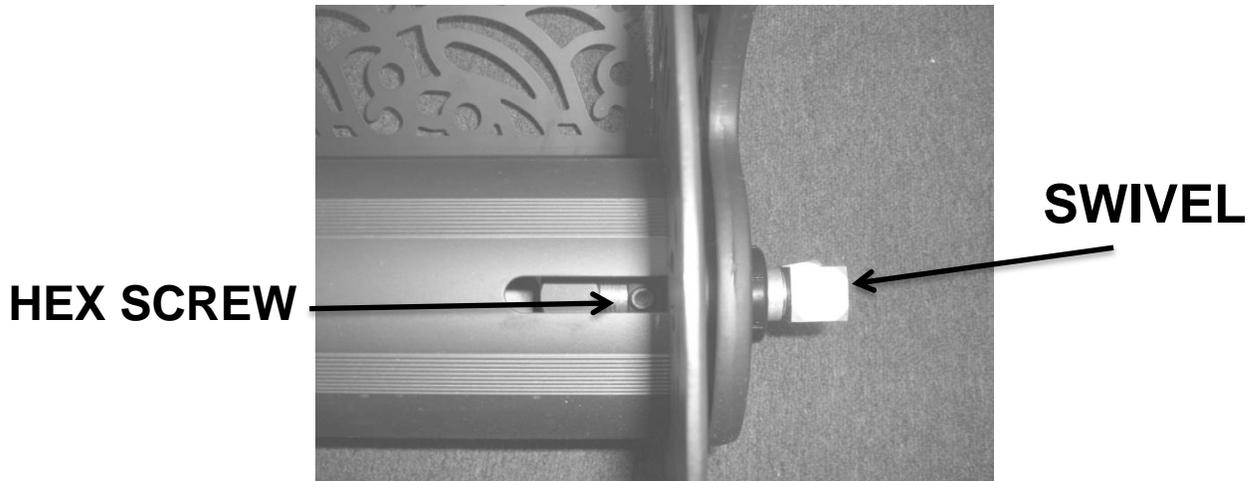

TOOLS REQUIRED:

ALLEN WRENCH OR HEX SCREWDRIVER
CHANNEL LOCKS/VICE GRIPS

- 1 Locate the opening in the hose reel spool revealing the HEX SCREW.
- 2 Use an Allen Wrench or Hex Screwdriver to loosen the HEX SCREW. Do NOT completely remove the HEX SCREW. Reverse it out enough to reverse the pressure on the set screw.
- 3 Use the channel locks and vice grips to unscrew the SWIVEL from the water pipe/elbow located inside of the hose reel spool. **DO NOT HOLD THE SWIVEL** as it is designed to turn.
- 4 Remove old SWIVEL and tightly install the replacement SWIVEL.
- 5 Tighten HEX SCREW.
- 6 Re-attach leader hose to the new swivel and check for leakage.

Please call our Customer Service Department if you have any questions.

We are here to serve you Monday through Friday - 9 am to 5 pm EST

1-866-820-5805

Visit our website to see our complete offering of quality water hose storage products

www.libertygardenproducts.com